


RESTORE NAVNGO APPLICATION INSTRUCTIONS

Parts Required: 1 BLANK SD CARD / SD CARD READER

PLEASE NOTE: FOLLOW THESE INSTRUCTIONS TO RECTIFY THE ISSUE OF NAVIGATION NOT LOADING PAST THE SPLASH SCREEN (SEE BELOW)




1. Uncompress the 'restorenavngo.rar' and save the following 5 files to your desktop.

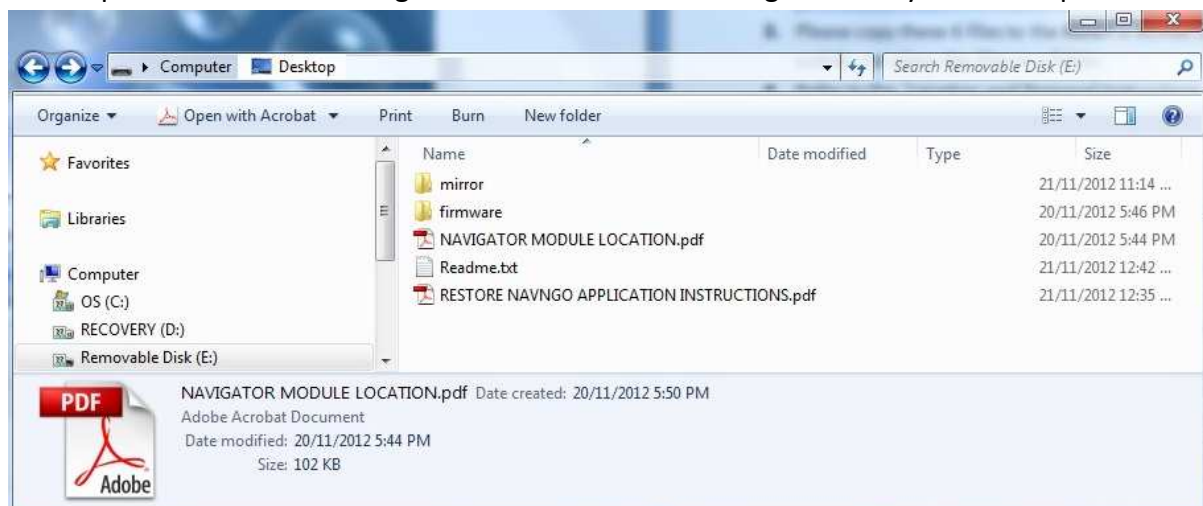


2. Refer to the 'NAVIGATION MODULE LOCATION' document on your desktop to locate the Navigation Hardware and MAP SD card.
3. Once Navigation Module has been located, ensure Keys are **NOT** in the ignition and stereo is **NOT** on.
(There should be **NO** red light on Navigation Module after waiting approximately 30 seconds.)
4. Remove the ASL Navigator Map Navigation SD Card from the Navigation module.


5. Connect ASL Map Navigation SD Card into your SD CARD reader. Locate the 'Navngo' folder and open. Copy the 'mirror' folder from your desktop and place into the 'Navngo' Folder.(See below)
6. Remove ASL Map Navigation SD Card from your SD CARD reader (Do **NOT** reinsert into Navigation Hardware at this point.

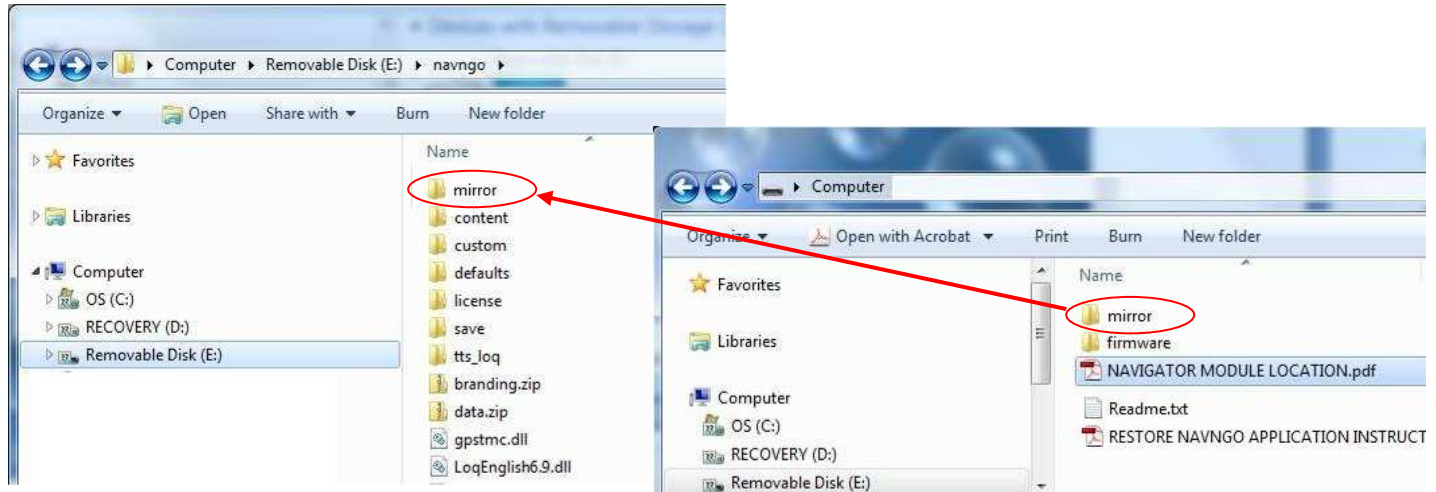

7. Take your BLANK SD card and connect to your SD Card reader.
8. Open the folder 'firmware' located on your desktop.
9. Please copy these 6 files to the **ROOT** of your BLANK SD card (**DO NOT USE YOUR MAP SD CARD**) and do not place the files in a folder.(See below)

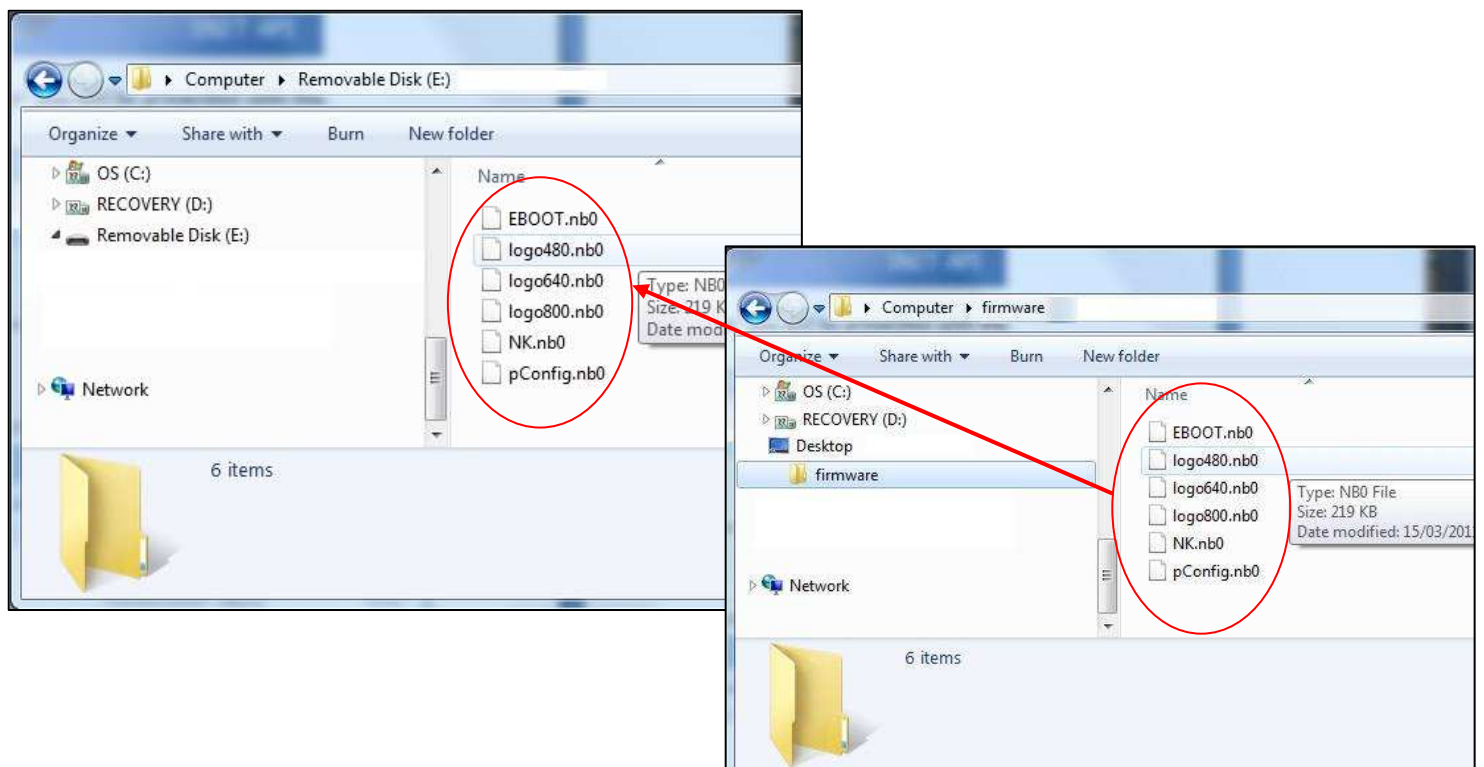

10. Insert SD Card with Firmware Update program into Navigation module.
11. Insert keys into ignition and switch keys to ACC position and press 'NAV' button on steering wheel.
12. The GPS should go into update firmware for around 30 seconds and when Update progress is complete the screen will show 'Update Success!'

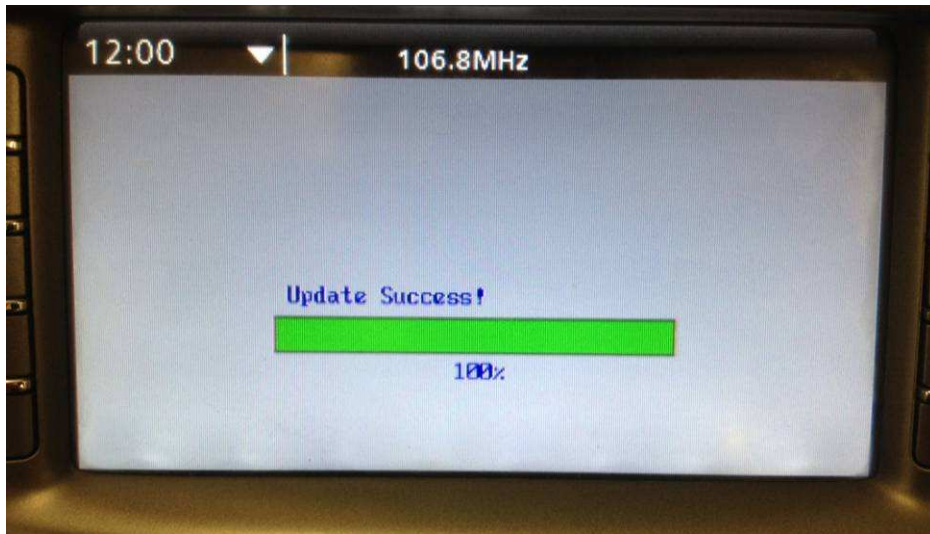

13. Remove card from navigation Hardware and remove keys and switch stereo off. (There should be **NO** red light on Navigation Module after waiting approximately 30 seconds.)
14. Reinsert ASL Navigator Map Navigation SD Card into the Navigation module.
15. Insert keys into ignition and switch keys to ACC position and press 'NAV' button on steering wheel.
16. If instructions have been followed correctly ASL Mapping will now load correctly and issue of map not loading past Splash Screen will not reoccur.

NOTE: IF REQUIRED FIRMWARE FILES CAN BE DELETED FROM BLANK SD CARD USED TO UPDATE THE FIRMWARE SOFTWARE.